

# Audio, Control & Instrumentation Cable

## 1 to 12pr, 16AWG Unscreened – LSZH/HFFR

### Sheath




C5358, C5359, C5360, C5361, C5362, C5363, C5364, C5365, C5366, C5367, C5368

### Applications

Overall screened paired cables suitable for Security and Alarm systems, Audio, Control and Instrumentation

### Cross Section Drawing

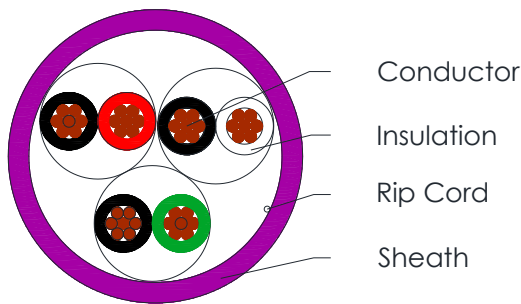

### Design

Unit	Properties
Conductor	Bare Copper wires
Insulation	Polyolefin Pair 1: Black/Red Pair 2: Black/White Pair 3: Black/Green Pair 4: Black/Blue Pair 5: Black/Yellow Pair 6: Black/Brown Pair 7: Black/Orange Pair 8: Black/Purple Pair 9: Black/Grey Pair 10: Black/Pink Pair 11: Black/Tan Pair 12: Black/Turquoise
Pair	two twisted wires
Cable Core	N pairs stranded
Rip Cord	Nylon Yarn
Sheath Material	Halogen Free Flame-Retardant (LSZH/HFFR) Standard colour: Purple
Standard Put Up Length	305 meters

\*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

# Audio, Control & Instrumentation Cable

## 1 to 12pr, 16AWG Unscreened – LSZH/HFFR

### Sheath



C5358, C5359, C5360, C5361, C5362, C5363, C5364, C5365, C5366, C5367, C5368

### Physical Characteristics

Part Number	C5358	C5359	C5360	C5361	C5362	C5363	C5364	C5365	C5366	C5367	C5368
No. of Pairs	1	2	3	4	5	6	7	8	9	10	12
Nom. Diameter Conductor (AWG)	16 (19 x29)										
Nom. Radial Thickness Insulation (mm)	0.25										
Nom. Radial Thickness Sheath (mm)	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	0.9	1.0	1.0
Nom. Overall Diameter (mm)	5.4	8.8	9.4	10.3	11.4	12.4	12.8	13.7	15.2	16.4	17.0
Operating Temperature (°C)	-25°C to +75°C										
Max. Recommended Pulling Tension (N)	190	380	570	760	960	1150	1690	1925	2180	2430	2870
Min. Bend Radius (install) (mm)	54	88	94	103	114	124	128	137	152	164	170
Nominal Cable Weight (kg/km)	42.2	80.9	107.3	137.5	167.0	196.7	223.3	257.6	288.2	324.7	378.5

### Electrical Characteristics

Part Number	C5358	C5359	C5360	C5361	C5362	C5363	C5364	C5365	C5366	C5367	C5368
No. of Pairs	1	2	3	4	5	6	7	8	9	10	12
Max. Conductor Resistance (Ohm/km)	15.47										
Capacitance cond to cond (pF/m)	55	55	55	55	55	50	50	50	50	50	50
Max. Current at 25°C (Amps)	5	5	4.35	4.35	4.35	4.35	4.35	3.5	3.5	3.5	3.5
Operating Voltage (Vrms)	300										

### Reference Standards

(BS) EN 50290-2	IEC 60332-3-24
IEC 61034	IEC 60754-1&-2
IEC 60228	RoHS directives