

RG-8/U Type Coaxial Cable

LSZH-HFFR Sheath




C5490

Application

RF and Broadcast transmission as well as in wireless communication applications.

Cross Section Drawing

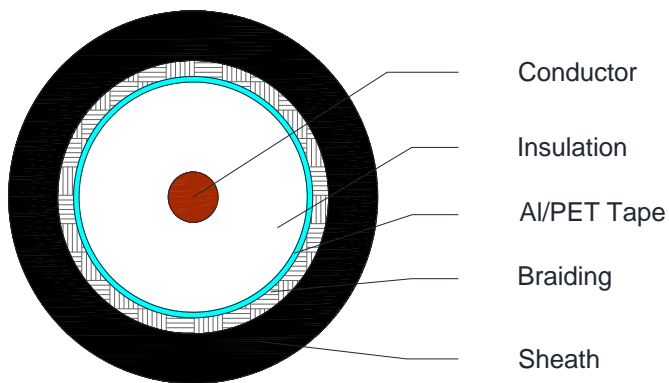

Design

Unit	Properties
Conductor	Solid Bare Copper Wire
Dielectric	Foamed Polyethylene
Screen	Aluminium/Polyester foil tape
Braid	Tinned Copper Wire
Sheath Material	Halogen Free Flame-Retardant (LSZH-HFFR) Standard Color: Black
Standard Put Up Length	305 or 500 metres

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

RG-8/U Type Coaxial Cable

LSZH-HFFR Sheath



C5490

Physical Characteristics

Part Number	C5490
Conductor Configuration(AWG)	10
Nom. Diameter Conductor(mm)	2.75
Nom. Diameter Dielectric	7.3
Screen Coverage (%)	115
Coverage Braid (%)	90
Nom. Overall Diameter(mm)	10.3
Operating Temperature (°C)	-40°C to +85°C
Max. Recommended Pulling Tension (N)	1335
Min. Bend Radius (install)(mm)	100
Nominal Cable Weight (kg/km)	160

Electrical Characteristics 20°C

Max. Conductor Resistance (Ω/km)	Max.DC Shield Resistance (Ω/km)	Impedance (ohms)	Nom. Inductance (μH/m)	Nom Capacitance Conductor to Shield (pF/m)	Nominal Velocity Of Propagation (%)	Nom. Time Delay (ns/m)	Screening Efficiency 30 – 2500 MHz (dB)	Min. Return Loss 5 – 2200 MHz	Max. Operating Voltage (VRMS)
4.6	5.6	50 ± 3	0.20	75	82	5.05	> 90	21	600

Nominal Attenuation in dB/100

Frequency (MHz)	Attenuation (dB/100m)
5	1.4
10	1.7
50	3.3
100	4.6
200	5.9

Frequency (MHz)	Attenuation (dB/100m)
400	8.6
700	11.9
900	13.5
1000	14.5

Reference Standards

(BS) EN 50290-2	IEC 60332-3-24
(BS) EN 50117	IEC 61034-1&-2
IEC 61196	IEC 60754-1&-2
RoHS directives	