

Audio Control & Instrumentation Cable, 2PR, 18AWG, Individual & Overall Screen with HFFR-LSZH Sheath




C5032

Applications

Screened Multi-Conductor cable suitable for Audio, Control, Instrumentation and Building Management Systems (BMS)

Cross Section Drawing

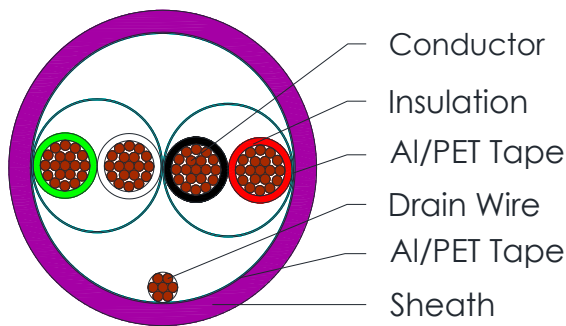

Design

Unit	Properties
Conductor	Flexible Tinned Copper wire
Insulation	Polyolefin Pair 1: Black & Red Pair 2: White & Green
Individual Screen	Aluminium/Polyester 100% Coverage
Drain wire	20 AWG (7 x 28) Tinned Copper
Overall Screen	Aluminium/Polyester 100% Coverage
Sheath	Halogen Free Flame Retardant (HFFR-LSZH) Standard colour: Purple
Standard Put Up Length	305 meters

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Audio Control & Instrumentation Cable, 2PR, 18AWG, Individual & Overall Screen with HFFR-LSZH Sheath



C5032

Physical Characteristics

Part Number	C5032
No of pairs	2
Conductor Configure (AWG)	18 (19 x 30)
Nom. Radial Thickness Insulation(mm)	0.28
Nom. Radial Thickness Sheath(mm)	0.90
Nom. Overall Diameter(mm)	9.0
Operating Temperature (°C)	-20 to +80
Max. Recommended Pulling Tension (N)	460
Min. Bend Radius (install)(mm)	90
Nominal Cable Weight (kg/km)	90

Electrical Characteristics at 20°C

Part Number	C5032
No of pairs	2
Nom. DC Resistance Conductor (Ω /km)	21.3
Nom. DC Resistance Screen (Ω /km)	27.9
Capacitance conductor to conductor (pF/m)	100
Capacitance cond. To other cond.+screen (pF/m)	210
Max. Recommended Current at 25°C (Amps)	5
Max. Operating Voltage (Vrms)	300

Reference Standards

(BS) EN 50290-2	IEC 60754-1&-2
IEC 60228	IEC 61034-1&-2
IEC 60332-3-24	RoHS directives