

Audio Control & Instrumentation Cable

1 pr 22 to 12AWG, Overall Screen, HFFR/LSZH Sheath




C5094, C5095, C5096, C5097, C5098, C5099

Applications

Screened one pair cable suitable for Audio Control, Instrumentation and Building Management Systems (BMS)

Cross Section Drawing

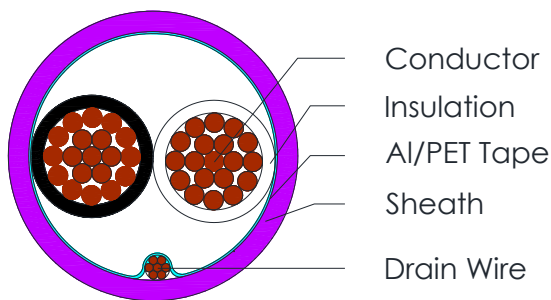

Design

Unit	Properties
Conductor	Tinned Copper Wires
Insulation	Polyethylene Core 1: Black Core 2: Clear
Pair	Two wires twisted together
Screen	Aluminium/Polyester 100% Coverage
Drain wire	24 AWG (7 x 32) Tinned Copper wire
Sheath Material	Halogen Free Flame-Retardant (HFFR/LSZH) Standard colour: Purple
Standard Put Up Length	305 meters

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Audio Control & Instrumentation Cable

1 pr 22 to 12AWG, Overall Screen, HFFR/LSZH Sheath



C5094, C5095, C5096, C5097, C5098, C5099

Physical Characteristics

Part Number	C5094	C5095	C5096	C5097	C5098	C5099
Number of pairs	1					
Conductor size (AWG)	12	14	16	18	20	22
Conductor stranding (AWG)	19 x 25	19x27	19x29	7x26	7x28	7x30
Nom. Radial Thickness Insulation (mm)	0.8	0.8	0.8	0.5	0.5	0.4
Nom. Insulation diameter (mm)	3.95	3.42	3.02	2.16	1.73	1.54
Nom. Radial Thickness Sheath (mm)	0.9	0.9	0.8	0.7	0.6	0.6
Nom. Overall Diameter (mm)	9.8	9.0	7.9	5.8	4.8	4.4
Operating Temperature (°C)	-25 / +75					
Max. Recommended Pulling Tension (N)	665	420	270	200	110	80
Min. Bend Radius (install) (mm)	102	90	79	58	48	44
Nominal Cable Weight (kg/km)	122	90	65	43	29	24

Electrical Characteristics

Part Number	C5094	C5095	C5096	C5097	C5098	C5099
Conductor AWG size (AWG)	12	14	16	18	20	22
Impedance (Ω)	54	56	65	60	56	64
Max. DC Resistance Conductor (Ω /km)	5.61	9.5	14.7	21.7	35.75	52.7
Max. DC Resistance Screen (Ω /km)	78.5					
Capacitance conductor to conductor (pF/m)	80	76	76	75	75	75
Capacitance cond. To other cond.+screen (pF/m)	160	154	144	134	120	108
Nominal Inductance (μ H/m)	0.6					
Max. Recommended Current at 25°C (Amps)	13	9.5	7.1	5.2	3.9	2.9
Max. Operating Voltage (Vrms)	600	600	600	300	300	300

Reference Standards

(BS) EN 50290-2	IEC 61034
IEC 60228	IEC 60754-1&-2
IEC 60332-1	RoHS directives