

Control and Instrumentation Cables

PAS/BS5308 Part 1, Type 1 & 2

LSF Sheath




C4342 TO C4363

Applications

Process control, equipment interconnection, typically in chemical and petrochemical locations. The unarmoured versions (Type 1) are generally use for indoor installation and suitable for wet and damp areas. The armoured versions (Type 2) are generally used for outdoor applications and can be used in direct burial applications.

Cross Section Drawing

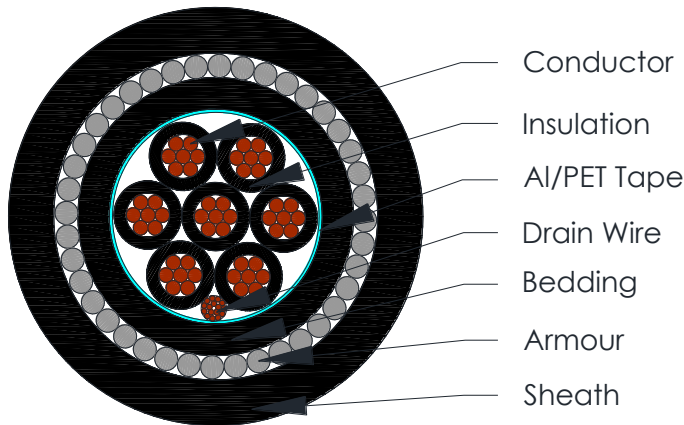

Design

Unit	Properties
Conductor	Class5 plain copper wire
Insulation	PE Color: Black with Numbers
Cabling	Cores cabled together
Screen	Aluminum/Polyester tape with Tinned copper drain wire
Bedding (where requested)	LSF
Armour (where requested)	Galvanized Steel Wire Armour
Outer Sheath Material	LSF Standard Colour: Black
Standard Put Up Length	305M or 500m

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Control and Instrumentation Cables

PAS/BS5308 Part I, Type I & 2

LSF Sheath



C4342 TO C4363

Electrical Characteristics at 20°C

Conductor Size(sqmm)	Conductor Construction	Max. DCR (Ohm/km)	Max. Mutual Capacitance (pF/m) at 1KHz	Max. Mutual Capacitance unbalance (pF/500m) at 1KHz	Test voltage between conductors and between conductors and screen (V r.m.s.)	Max. L/R ratio (μH/Ω)	Min Insulation Resistance of PE (M.Ωm/km)
1.50	7*0.53	12.3	75	500	1000	40	5000
2.50	7*0.67	7.6	105	500	1000	60	5000

Constructional Information

Part 1: Type1: Collectively Screened Unarmoured

P/N	Number of Cores	Conductor Construction (sq mm)	Nom. Radial Thickness of Insulation (mm)	Drain wire cross section (sq mm)	Nom. Thickness of Jacket (mm)	Overall Diameter (mm)	Nom. Weight (kg/km)
C4342	2	1.50 (7*0.53)	0.6	0.5	0.80	7.30	67.6
C4343	4	1.50 (7*0.53)	0.6	0.5	0.90	8.60	113.2
C4344	5	1.50 (7*0.53)	0.6	0.5	0.90	9.40	141.6
C4345	6	1.50 (7*0.53)	0.6	0.5	1.00	9.90	162.6
C4346	8	1.50 (7*0.53)	0.6	0.5	1.00	11.00	208.3
C4347	12	1.50 (7*0.53)	0.6	0.5	1.10	13.90	307.5
C4348	14	1.50 (7*0.53)	0.6	0.5	1.10	14.60	351.9
C4349	20	1.50 (7*0.53)	0.6	0.5	1.30	17.10	512.4

Part 1: Type2: Collectively Screened Armoured

P/N	Number of Cores	Conductor Construction (sq mm)	Nom. Radial Thickness of Insulation (mm)	Drain wire cross section (sq mm)	Diameter of Bedding (mm)	Diameter of Armour (mm)	Nom. Thickness of Jacket (mm)	Nom. Diameter of cable (mm)	Nom. Weight (kg/km)
C4350	2	1.50 (7*0.53)	0.60	0.50	7.50	9.30	1.40	12.10	245
C4351	3	1.50 (7*0.53)	0.60	0.50	7.70	9.50	1.40	12.30	301
C4352	6	1.50 (7*0.53)	0.60	0.50	9.90	11.70	1.40	14.50	458
C4353	7	1.50 (7*0.53)	0.60	0.50	10.50	12.30	1.40	15.10	509
C4354	8	1.50 (7*0.53)	0.60	0.50	11.00	12.80	1.40	15.60	558
C4355	12	1.50 (7*0.53)	0.60	0.50	13.60	16.10	1.50	17.80	661
C4356	15	1.50 (7*0.53)	0.60	0.50	15.60	18.10	1.60	21.30	950
C4357	16	1.50 (7*0.53)	0.60	0.50	15.70	18.20	1.60	21.40	1018
C4358	20	1.50 (7*0.53)	0.60	0.50	17.10	19.60	1.70	23.00	1262
C4359	24	1.50 (7*0.53)	0.60	0.50	19.20	21.70	1.70	25.50	1396
C4360	30	1.50 (7*0.53)	0.60	0.50	20.80	24.00	1.80	27.60	1867
C4361	40	1.50 (7*0.53)	0.60	0.50	23.70	26.90	1.80	30.50	2357
C4362	2	2.50(7*0.67)	0.60	0.50	8.30	10.10	1.40	12.90	307
C4363	3	2.50(7*0.67)	0.60	0.50	8.80	10.60	1.40	13.40	377

Control and Instrumentation Cables
PAS/BS5308 Part 1, Type 1 & 2
LSF Sheath



C4342 TO C4363

Reference Standards

BS5308 Part 1	EN 50290-2
BS EN 60228	RoHS directives
BS 7655	IEC60332-1