

# Shotgun Field Telephone Cable




C4268

## Applications

Lightweight, field deployable telecoms cable.

## Cross Section Drawing

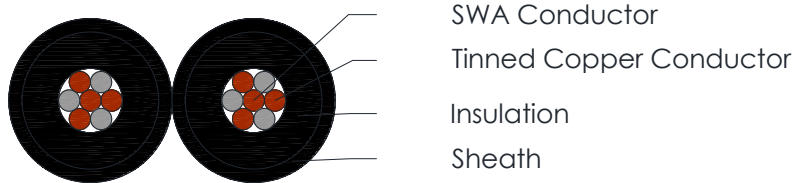

## Design

Unit	Properties
Conductor	7 strands consisting of 3 twisted galvanized steel wires and 4 tinned copper wires The seven wires shall be uniformly stranded with the centre wire being copper, with the outer wires alternately copper and steel.
Insulation	Polyethylene Color: Black
Sheath	Polyethylene Color: Black
Shape	Two insulated and sheathed cores stick together parallelly.
Standard Put Up Length	500 metres

\*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

## C4268

### Physical Characteristics

No Cores	Diameter Single Galvanised Steel wire (mm)	Diameter Single Tinned Copper wire (mm)	Nominal Diameter Insulation (mm)	Max. Diameter Sheath (mm)	Max. Overall Dimensions (mm)
2	0.28	0.28	1.80	2.80	2.80 x 5.60

### Electrical Characteristics at 20°C

Max. Conductor Resistance (Ohm/km)	Min. Insulation Resistance (Mohm/km)	Dielectric Strength (Vrms)	Voltage rating at 2000 Hz (V)	Attenuation	
				at 400 Hz (Db/km)	3300 Hz (Db/km)
151	3500	3000	600	1.2	2.3

### Pair Colour Code

Operating Temperature Range (°C)	Storage Temperature Range (°C)	Min. Breaking load per leg (N)	Weight (kg/km)
-40 to +70	-55 to +80	390	13

### Reference Standards

EN 50290-2
RoHS Directives