

Audio, Control & Instrumentation Cable

2 to 12pr, 20AWG Overall Screened – PVC Sheath




C4074, C4075, C4076, C4077, C4078, C4079, C4080, C4081, C4082, C4083

Applications

Overall screened paired cables suitable for Security and Alarm systems, Audio, Control and Instrumentation

Cross Section Drawing

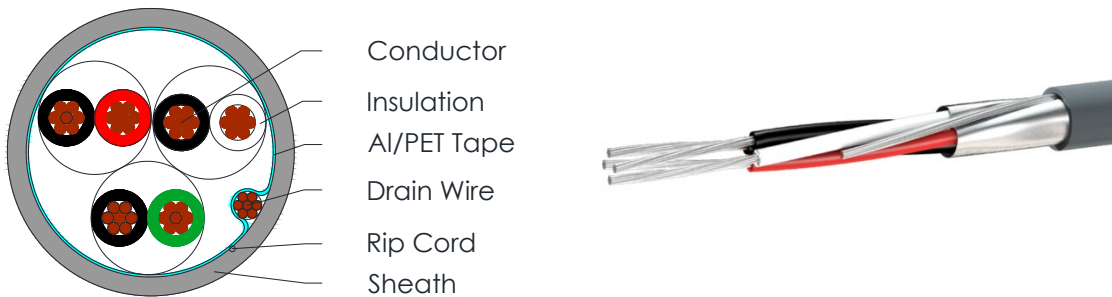

Design

Unit	Properties
Conductor	Bare Copper wires
Insulation	Polyolefin Pair 1: Black/Red Pair 2: Black/White Pair 3: Black/Green Pair 4: Black/Blue Pair 5: Black/Yellow Pair 6: Black/Brown Pair 7: Black/Orange Pair 8: Black/Purple Pair 9: Black/Grey Pair 10: Black/Pink Pair 11: Black/Tan Pair 12: Black/Turquoise
Pair	two twisted wires
Cable Core	N pairs stranded
Overall Screen	Aluminium/Polyester foil
Drain Wire	Tinned Copper Wire
Rip Cord	Nylon Yarn
Sheath Material	Flame-Retardant Polyvinyl Chloride (PVC) Standard colour: Grey
Standard Put Up Length	305 meters

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Audio, Control & Instrumentation Cable

2 to 12pr, 20AWG Overall Screened – PVC Sheath



C4074, C4075, C4076, C4077, C4078, C4079, C4080, C4081, C4082, C4083

Physical Characteristics

Part Number	C4074	C4075	C4076	C4077	C4078	C4079	C4080	C4081	C4082	C4083
No. of Pairs	2	3	4	5	6	7	8	9	10	12
Conductor Construction(AWG)	20 (7 x28)									
Nom. Radial Thickness Insulation (mm)	0.20									
Drain wire size (AWG)	24AWG (7 x32)									
Coverage of screen (%)	115									
Nom. Radial Thickness Sheath (mm)	0.4	0.4	0.5	0.5	0.6	0.6	0.6	0.8	0.8	0.8
Nom. Overall Diameter (mm)	5.7	6.1	6.7	7.4	7.9	8.1	8.8	9.9	10.4	10.6
Operating Temperature (°C)	-25°C to +75°C									
Max. Recommended Pulling Tension (N)	322	463	592	800	930	1118	1285	1460	1625	1915
Min. Bend Radius (install) (mm)	57	61	67	74	79	81	88	99	104	106
Nominal Cable Weight (kg/km)	37	49	65	78	95	107	120	144	158	182

Electrical Characteristics

Part Number	C4074	C4075	C4076	C4077	C4078	C4079	C4080	C4081	C4082	C4083
No. of Pairs	2	3	4	5	6	7	8	9	10	12
Max. Conductor Resistance (Ohm/km)	35.75									
Max. Screen Resistance (Ohm/km)	78.5									
Capacitance cond to cond (pF/m)	70	70	70	65	65	65	65	65	65	65
Capacitance Cond to rest (pF/m)	140	140	140	135	135	135	130	130	130	130
Max. Current at 25°C (Amps)	3.0	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Operating Voltage (Vrms)	300									

Reference Standards

(BS) EN 50290-2
IEC 60228
IEC 60332-1
RoHS directives