

# Audio Control & Instrumentation Cable, High Conductivity Speaker Cable 22 to 12 AWG, Unscreened, LSF Sheath




C4132, C4133, C4134, C4135, C4136, C4137

## Applications

One pair cable Suitable for Audio, Control and Instrumentation.

## Cross Section Drawing

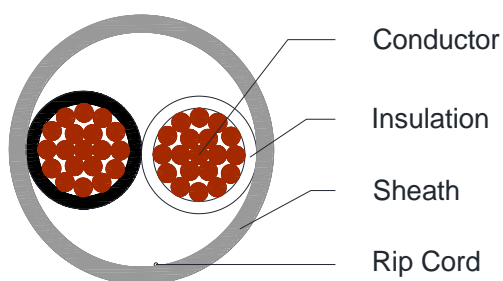

## Design

Unit	Properties
Conductor	Tinned Copper wire, one twisted pair
Insulation	LSF Core 1: Black Core 2: White
Sheath Material	LSF Standard colour: Grey
Standard Put Up Length	305 or 500 meters

\*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

**Audio Control & Instrumentation Cable,  
High Conductivity Speaker Cable  
22 to 12 AWG, Unscreened, LSF Sheath**



**C4132, C4133, C4134, C4135, C4136, C4137**

**Physical Characteristics**

Part Number	C4132	C4133	C4134	C4135	C4136	C4137
Number of pairs	1					
Conductor size	12	14	16	18	20	22
Conductor stranding (AWG)	19x25	19x27	19x29	7x26	7x28	7x30
Nom. Radial Thickness Insulation (mm)	0.8	0.8	0.8	0.5	0.4	0.4
Nom. Radial Thickness Sheath (mm)	0.9	0.9	0.8	0.7	0.6	0.6
Nom. Overall Diameter(mm)	9.7	8.7	7.65	5.75	4.7	4.3
Operating Temperature (°C)	-25 / +75					
Max. Recommended Pulling Tension (N)	665	420	270	200	110	80
Min. Bend Radius (install) (mm)	97	87	77	58	47	43
Nominal Cable Weight (kg/km)	115	85	60	38	23	19.5

**Electrical Characteristics**

Part Number	C4132	C4133	C4134	C4135	C4136	C4137
AWG size conductor	12	14	16	18	20	22
Max. DC Resistance Conductor ( $\Omega$ /km)	5.61	9.36	15.47	22.7	35.75	57.4
Capacitance conductor to conductor (pF/m)	68	62	57	60	60	55
Nominal Inductance ( $\mu$ H/m)	0.6					
Max. Recommended Current at 25°C (Amps)	13	9.5	7.1	5.2	3.9	2.9
Max. Operating Voltage (Vrms)	600	600	300	300	300	300

**Reference Standards**

(BS) EN 50290-2
IEC 60228
IEC 60332-1
RoHS directives