

Class I Speaker Cable – 1 pr, 10AWG

600V, PVC Sheath




C285 I

Applications

Auditorium, Stadium, Race Track, Church, Temple, Synagogue, Place of Assembly, Casino, Sound.

Cross Section Drawing

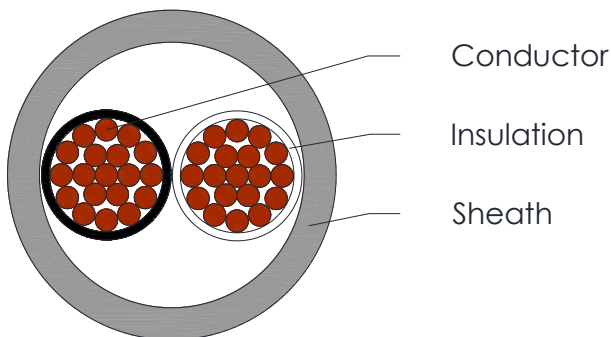

Design

Unit	Properties
Conductor	Flexible Bare Copper wire
Insulation	Polyvinyl Chloride/Nylon Colours for pairs: Black & White
Sheath Material	UV Resistant Polyvinyl Chloride (PVC) Standard Colour: Grey
Standard Put Up Length	305 metres

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Class I Speaker Cable – 1 pr, 10AWG

600V, PVC Sheath



C2851

Physical Characteristics

Part Number	C2851
No of pairs	1
Nom. Conductor Configuration (AWG)	10(19x23)
Nom. Overall Diameter (mm)	10.8
Operating Temperature (°C)	-30 / +90
Max. Recommend. Pulling Tension (N)	1040
Min. Bend Radius (install) (mm)	108
Nominal Cable Weight (kg/km)	155

Electrical Characteristics at 20°C

Part Number	C2851
No of pairs	2
Nom. DC Resistance Conductor (Ω /km)	3.28
Max. Operating Voltage (Vrms)	600

Reference Standards

IEC 60332-1
IEC 60228
BS/EN 50290
RoHS directives