

# Audio Control & Instrumentation Cable

## 2C to 8C, 16AWG, Unscreened, SWA Armour

### HFFR Sheath




C1912, C1914, C1916, C1918, C1920

#### Applications

Outdoor cables suitable for Audio, Control, Instrumentation and Building Management Systems (BMS)

#### Cross Section Drawing

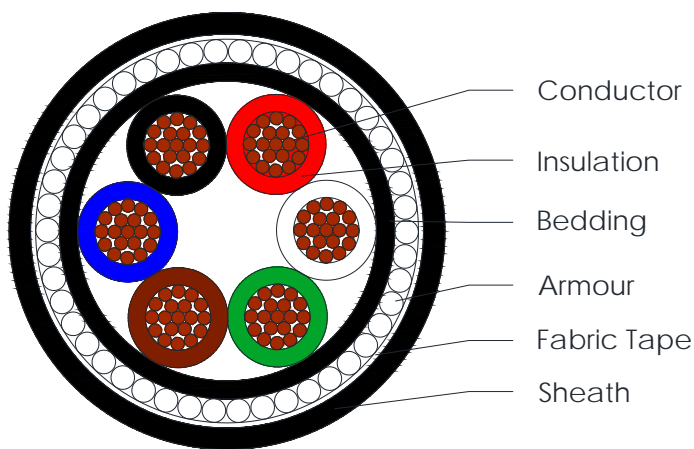

#### Design

Unit	Properties
Conductor	Flexible Bare Copper wire
Insulation	Polyolefin Core 1: Black Core 2: Red Core 3: White Core 4: Green Core 5: Brown Core 6: Blue Core 7: Orange Core 8: Yellow
Bedding	Flame-Retardant Halogen Free (HFFR) Standard colour: Black
Armouring	Galvanized steel wire
Wrapping	Fabric tape
Sheath	UV Resistance Flame-Retardant Halogen Free (HFFR) Standard colour: Black
Standard Put Up Length	305 meters

\*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

# Audio Control & Instrumentation Cable

## 2C to 8C, 16AWG, Unscreened, SWA Armour

### HFFR Sheath



C1912, C1914, C1916, C1918, C1920

#### Physical Characteristics

Part Number	C1912	C1914	C1916	C1918	C1920
No of cores x 16AWG (19 x 29)	2	3	4	6	8
Nom. Diameter Conductor (mm)	1.4				
Nom. Radial Thickness Insulation (mm)	0.25				
Nom. Radial Thickness Bedding (mm)	0.8				
Nom. Bedding Diameter (mm)	5.4	5.7	6.2	7.3	7.9
Nom. Armour wire Diameter (mm)	0.9				
Nom. Armour coverage (%)	95				
Nom. Sheath thickness (mm)	1.25				
Nom. Overall Diameter (mm)	9.7	10.0	10.5	11.6	12.2
Operating Temperature	-25 / +75				

#### Electrical Characteristics

Part Number	C1912	C1914	C1916	C1918	C1920
Max. DC Resistance Conductor ( $\Omega$ /km)	15.47				
Capacitance conductor to conductor	123	122	108	100	86
Nominal Inductance	0.5				
Max. Recommended Current at 25°C	6.25	6.25	5	4.35	4.35
Max. Operating Voltage	300				

#### Reference Standards

(BS) EN 50290-2
EN 60228
IEC 60754-1 & 2
IEC 61034
IEC 60332-3-24
EN 60811-HD21.14
RoHS directives