

Low Capacitance RS-485 Computer Cables

22 & 24AWG, Shielded and Armoured,


LSZH/HFFR Sheath



C1984, C1985, C1986, C1987, C1989, C1990, C1991, C1992
Applications

Armoured computer Cables used for EIA RS-485 applications.

Cross Section Drawing

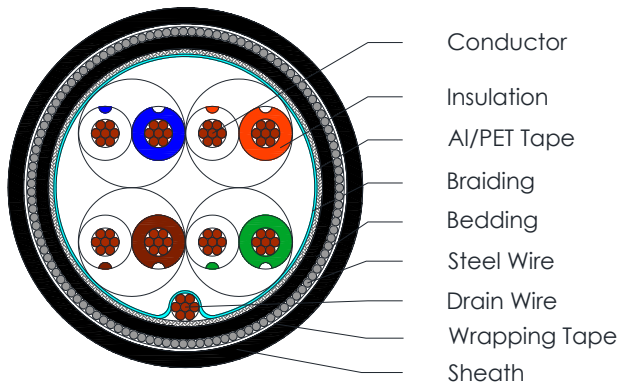

Design

Unit	Properties
Conductor	Tinned Copper wire, flexible
Insulation	Foam or solid PE Color code Pair 1: WHITE/Blue + BLUE/White Pair 2: WHITE/Orange + ORANGE/White Pair 3: WHITE/Green + GREEN/White Pair 4: WHITE/Brown + BROWN/White Color code for C1444 Pair 1: WHITE/Orange + ORANGE/White Core 1: BLUE/White
Pair	two twisted wires
Cable Core	N pairs stranded
Filler	Optional
Screen	Aluminium/Polyester 100% Coverage
Drain Wire	Tinned Copper 24AWG (7 x 32)
Braid	Tinned Copper Wire
Bedding	Halogen Free Fire Resistant (LSZH/HFFR)
SWA	Galvanized Steel Wire
Wrapping Tape	Fabric Tape
Sheath Material	Halogen Free Fire Resistant (LSZH/HFFR) Standard Color: Black
Standard Put Up Length	305 or 500 metres

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Low Capacitance RS-485 Computer Cables

22 & 24AWG, Shielded and Armoured,

LSZH/HFFR Sheath



C1984, C1985, C1986, C1987, C1988, C1989, C1990, C1991, C1992

Physical Characteristics

Part Number	C1984	C1985	C1986	C1987	C1988	C1989	C1990	C1991	C1992
No of pairs	1	1.5	2	3	4	1	2	3	4
Conductor Gauge (AMG)	22					24			
Conductor configuration (AMG)	7 x 30					7 x 32			
Insulation material	FPE	FPE	FPE	FPE	FPE	FPE	PE	PE	PE
Nom. Radial Thickness Insulation (mm)	0.63	0.63	0.58	0.58	0.58	0.60	0.63	0.63	0.63
Coverage braid (%)	65					90			
Nom. Radial Thickness Bedding (mm)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Steel Wire Diameter (mm)	0.90								
Nom. Radial Thickness Sheath (mm)	0.90	0.90	1.00	1.3	1.3	0.90	1.00	1.2	1.3
Nom. Overall Diameter (mm)	10.4	11.1	12.4	14.2	15.1	10.2	12.4	13.9	15.0
Operating Temperature (°C)	-25 / +75								
Nominal Cable Weight (kg/km)	214	233	273	327	364	194	268	303	357

Electrical Characteristics

Part Number	C1984	C1985	C1986	C1987	C1988	C1989	C1990	C1991	C1992
No of pairs	1	1.5	2	3	4	1	2	3	4
Max. DC Resistance Conductor (Ω /km)	57.4					88			
Max. DC Resistance Screen (Ω /km)	20					15			
Nominal Impedance (Ω)	120								
Capacitance core to core (pF/m)	36	36	37	38	38	32	42	42	45
Capacitance core to rest (pF/m)	69	69	69	69	69	70	80	80	90
Nom. Attenuation at 1 MHz (dB/100m)	2.05					2.6			
Max. Recom. Current @ 25°C (Amps)	2.7	2.7	2.7	2.7	2.7	2.1	2.1	1.54	1.54
Max. Operating Voltage (Vrms)	300								

Reference Standards

IEC 60228	(BS)EN 50290-2
IEC 61034-2	IEC 60754-1&-2
IEC 60332-3-24	RoHS directives