

Audio, Control & Instrumentation Cable

2 to 12pr,22AWG Overall Screened – PVC Sheath




CI 4017, CI 4018, CI 4019, CI 4020, CI 4021, CI 4022, CI 4023, CI 4024,
CI 4025, CI 4026

Applications

Overall screened paired cables suitable for Security and Alarm systems, Audio, Control and Instrumentation

Cross Section Drawing

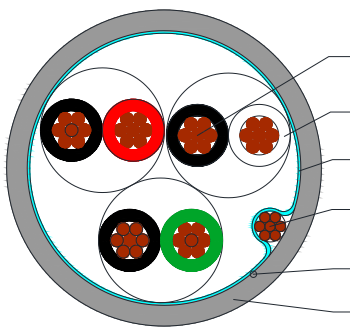

Conductor
Insulation
AI/PET Tape
Drain Wire
Rip Cord
Sheath



Design

Unit	Properties
Conductor	Tinned Copper wires
Insulation	Polyolefin Pair 1: Black/Red Pair 2: Black/White Pair 3: Black/Green Pair 4: Black/Blue Pair 5: Black/Yellow Pair 6: Black/Brown Pair 7: Black/Orange Pair 8: Black/Purple Pair 9: Black/Grey Pair 10: Black/Pink Pair 11: Black/Tan Pair 12: Black/Turquoise
Pair	two twisted wires
Cable Core	N pairs stranded
Drain Wire	Tinned Copper Wire
Overall Screen	Aluminium/Polyester foil
Rip Cord	Nylon Yarn
Sheath Material	Flame-Retardant Polyvinyl Chloride (PVC) Standard colour: Grey
Standard Put Up Length	305 meters

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Audio, Control & Instrumentation Cable

2 to 12pr,22AWG Overall Screened – PVC Sheath



C14017, C14018, C14019, C14020, C14021, C14022, C14023, C14024,
C14025, C14026

Physical Characteristics

Part Number	C14017	C14018	C14019	C14020	C14021	C14022	C14023	C14024	C14025	C14026
No. of Pairs	2	3	4	5	6	7	8	9	10	12
Nom. Diameter Conductor (AWG)	22 (7 x30)									
Nom. Radial Thickness Insulation (mm)	0.20									
Drain wire size (AWG)	24AWG (7 x32)									
Coverage of screen (%)	115									
Nom. Radial Thickness Sheath (mm)	0.4	0.4	0.4	0.5	0.5	0.5	0.6	0.6	0.7	0.8
Nom. Overall Diameter (mm)	5.1	5.4	5.9	6.7	7.4	7.6	8.2	9.0	9.9	10.4
Operating Temperature (°C)	-25°C to +75°C									
Max. Recommended Pulling Tension (N)	186	267	348	430	510	600	686	770	856	1027
Min. Bend Radius (install) (mm)	51	54	59	67	74	76	82	90	99	104
Nominal Cable Weight (kg/km)	25.3	32.7	41.6	55.0	65.5	72.2	84.0	93.1	106.3	126.3

Electrical Characteristics

Part Number	C14017	C14018	C14019	C14020	C14021	C14022	C14023	C14024	C14025	C14026
No. of Pairs	2	3	4	5	6	7	8	9	10	12
Max. Conductor Resistance (Ohm/km)	57.4									
Max. Screen Resistance (Ohm/km)	78.5									
Capacitance cond to cond (pF/m)	79	79	79	84	84	84	84	84	90	90
Capacitance Cond to rest (pF/m)	142	142	142	153	153	153	153	153	160	160
Max. Current at 25°C (Amps)	2.2	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Operating Voltage (Vrms)	300									

Reference Standards

(BS) EN 50290-2
IEC 60228
IEC 60332-1
RoHS directives