

Composite Cable for Light Control PVC or HFFR Sheath




C14120, C15356

Applications

Universal composite control cable for applications such as lightning control.

Cross Section Drawing

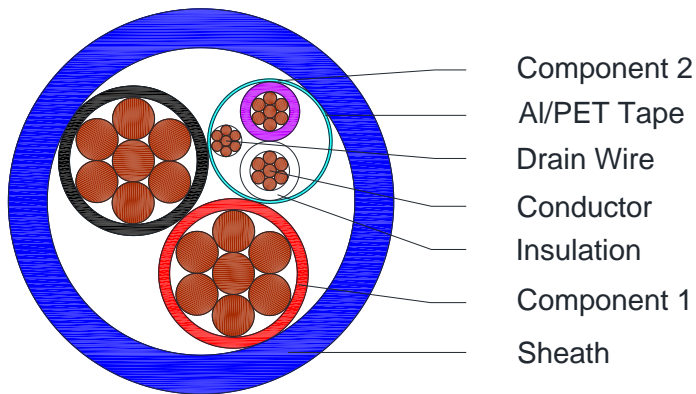

Design

| Unit | | Properties |
|------------------------------------|------------------------------------|--|
| Component 1, Common and power core | Conductor | Stranded annealed bare copper wires |
| | Insulation | PVC or HFFR Colour: Black, Red |
| Component 2, Data pair | Conductor | Stranded annealed bare copper wires |
| | Insulation | Polyethylene Colour: Purple and white |
| | Pairing | Twisted into a pair |
| | Drain wire | Tinned copper wire |
| | Screen | Al/PET Tape |
| Final Assembly | Component 1 and 2 Cabled together. | |
| Sheath | PVC or HFFR Colour: Blue | |
| Standard Put Up Length | 305M | |

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Composite Cable for Light Control PVC or HFFR Sheath



C14120, C15356

Physical Characteristics

| Part Number | C14120 | | | C15356 | | |
|----------------------------------|--------|--------|---------|--------|--------|---------|
| Insulation and sheath material | PVC | | | HFFR | | |
| Component No. | 1 | 2 | Overall | 1 | 2 | Overall |
| Core No. | 2 | 2 | - | 2 | 2 | - |
| Nom. Conductor Size (AWG) | 12 | 22 | - | 12 | 22 | - |
| Nom. Conductor Construction (mm) | 7×0.80 | 7×0.25 | - | 7×0.80 | 7×0.25 | - |
| Screen Coverage (%) | - | 115 | - | - | 115 | - |
| Drain wire construction (mm) | - | 7×0.20 | - | - | 7×0.20 | - |
| Nom. Overall Diameter (mm) | - | - | 8.15 | - | - | 8.15 |

Electrical Characteristics at 20°C

| Conductor Gauge | Max. Capacitance core to core at 1KHz (pF/m) | Max. Capacitance core to rest at 1KHz (pF/m) | Rated Voltage (V) |
|-----------------|--|--|-------------------|
| 22 | 82 | 157 | 300 |

Reference Standards

| | |
|---------------|---------------------------|
| EN 50290-2-23 | IEC 60754 (only for HFFR) |
| EN 50290-2-22 | IEC 61034(only for HFFR), |
| EN 50290-2-27 | IEC 60332-3-24 |
| IEC 60228 | RoHS directives |