

# Audio Control & Instrumentation Cable 2C to 8C, 22AWG, Unscreened,

## HFFR/LSZH Sheath




CI 5304, CI 5305, CI 5306, CI 5307, CI 5308

### Applications

Multi-Conductor cables suitable for Audio, Control, Instrumentation and Building Management Systems (BMS)

### Cross Section Drawing

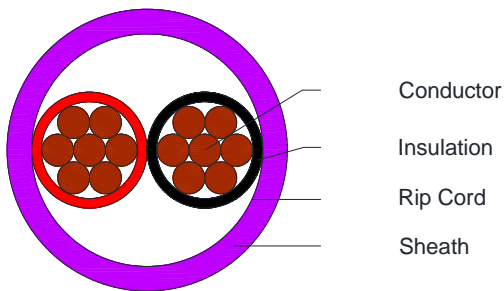

### Design

Unit	Properties
Conductor	N x Bare Copper wire, 22AWG flexible
Insulation	HFFR/LSZH Core 1: Black Core 2: Red Core 3: White Core 4: Green Core 5: Brown Core 6: Blue Core 7: Orange Core 8: Yellow
Rip Cord	Nylon Yarn
Sheath Material	Flame-Retardant Halogen Free (HFFR/LSZH) Standard colour: Purple
Standard Put Up Length	305 meters

\*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

# Audio Control & Instrumentation Cable 2C to 8C, 22AWG, Unscreened,

## HFFR/LSZH Sheath



C15304, C15305, C15306, C15307, C15308

### Physical Characteristics

Part Number	C15304	C15305	C15306	C15307	C15308
No of cores x 22AWG (7 x 30)	2	3	4	6	8
Nom. Diameter Conductor (mm)	0.75				
Nom. Radial Thickness Insulation (mm)	0.25				
Nom. Radial Thickness Sheath (mm)	0.6				
Nom. Overall Diameter (mm)	3.9	4.1	4.4	5.2	5.6
Operating Temperature (°C)	-25 / +90				
Max. Recommended Pulling Tension (N)	50	75	100	150	200
Min. Bend Radius (install) (mm)	39	41	44	52	56
Nominal Cable Weight (kg/km)	18.5	23.2	27.9	39	48.6

### Electrical Characteristics

Part Number	C15304	C15305	C15306	C15307	C15308
No of cores x 22AWG (7 x 30)	2	3	4	6	8
Max. DC Resistance Conductor ( $\Omega$ /km)	57.4				
Capacitance conductor to conductor (Pf/m)	55	55	58	57	57
Nominal Inductance ( $\mu$ H/m)	0.5				
Max. Recom. Current @ 25°C (Amps)	2.8	2.8	2.25	1.95	1.95
Max. Operating Voltage (Vrms)	300				

### Reference Standards

(BS) EN 50290-2
IEC 60228
IEC 60754-1 & 2
IEC 61034, IEC 60332-3-24
RoHS directives