Surface Mount Box

2 Port

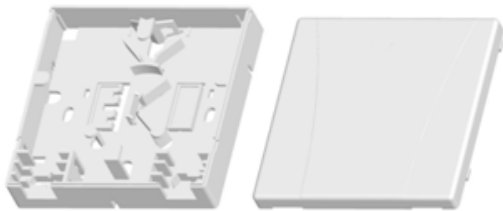**B3 International**

SMB-1001

Application

Surface mount Box for SC Simplex or LC Duplex Adaptors.

Product Picture

Environmental Conditions

Relative Humidity (Operational)	Temperature	
	Storage	Operational
Maximum Non Condensing 85%	-40 to +70˚C	-20 to +60˚C

General Characteristics

Properties	
Number of Splice/Terminations	2/2
Adaptor Support	SC Simplex
Housing	High Impact Flame Retardant Plastic
Mounting	Wall Mount
Fibre Bend Radius	>30mm
Dimension	86x105x23mm

Reference Standards

RoHS directives

Ordering Information

Partnumber	Description
SMB-1001	Fibre Surface Mount Box, 2 Port

B3 International
info@b3cable.com – www.b3cable.com

Page 1 of 1
Rev: 1.0
Date: 20/02/2015

Datasheets are subject to change without notice