

Fibre Optical Multi Loose Tube Cable, Indoor-Outdoor 24F to 144F, Corrugated Steel Tape Armour 2.3mm PBT




OFC-34X024-LBC to OFC-34X144-LBC

Applications

Building interconnection, Backbone networks, Telecommunication and drop cable applications. This cable has full rodent protection and can be direct buried.

Cross Section Drawing

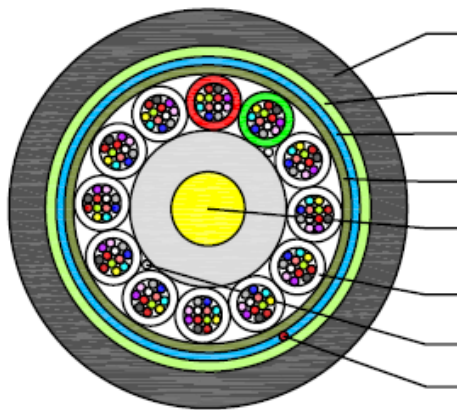

- Black HFFR Outer Sheath, UV Stable
(Other Sheath Colours Available on Request)
- Corrugated Steel Tape
- Water blocking E-glass yarn
- Water-Swallowable Tape
- FRP dielectric central strength member (OD 2.5mm),
PE coated (OD 6.7mm)
- Gel filled loose tube with optical fibres
- Water blocking yarn
- Rip Cord

Design

Unit	Properties
Fibre	Jelly Filled Loose Tube with Optical Fibre
Strength Member	Fibre Reinforced Central Strength Member (FRP) PE Coated above 72F
Waterblocking Agent – CSM	Water Blocking Yarn
Tape	Water Swellable Tape
Waterblocking Agent – Cable	E-Glass
Ripcord	Yes
Armour	Corrugated Steel Tape (CST)
Sheath Material	UV Stable Halogen Free Flame Retardant (HFFR)
Sheath Colour	Black as Standard
Standard Put Up Length	2000 meters
Packaging Details	Wooden Drum

*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

Fibre Optical Multi Loose Tube Cable, Indoor-Outdoor 24F to 144F, Corrugated Steel Tape Armour 2.3mm PBT



OFC-34X024-LBC to OFC-34X144-LBC

Physical Characteristics

Fibre Count	No of Tubes/ Fillers	Fibres per tube	Loose tube Diameter (mm)	CSM OD (mm)	CSM PE Coated	Cable OD (mm)	Cable Weight (Kg/km)	Operating Temperature (°C)
24	2/3	12	2.3	1.0	No	11.5	153	-40 to +70
36	3/2							
48	4/1							
60	5/1			2.5	No	12.5	184	
72	6/0							
96	8/0							
144	12/0							
				2.5/3.8	Yes	14.5	222	
				2.5/6.7	Yes	17.5	301	

Mechanical Characteristics

Fibre Count	Max. Tensile Strength (N)	Max. Crush Resistance	Impact	Min. Bend Radius	
24	1200	10KN / 10cm	3 Impacts (W/30N.m)	20xOD	
36					
48					
60	2400				
72					
96					3200
144					4500

Colour Coding Scheme

Fibre Colour 1	2	3	4	5	6	7	8	9	10	11	12
Red	Green	Blue	Yellow	White	Grey	Brown	Violet	Turquoise	Black	Orange	Pink
Fibre Colour 13	14	15	16	17	18	19	20	21	22	23	24
Red	Green	Blue	Yellow	White	Grey	Brown	Violet	Turquoise	Black*	Orange	Pink
Fibre 13-24 with a Black Ring, * with a white ring											
Tube Colour											
Red	Green	White	White	White	White	White	White	White	White	White	White

Fibre Optical Multi Loose Tube Cable, Indoor-Outdoor 24F to 144F, Corrugated Steel Tape Armour 2.3mm PBT



OFC-34X024-LBC to OFC-34X144-LBC

Reference Standards

ITU-T G652 , ITU-T G657	EN 50266-1
IEC60304	EN 50266-2-2
IEC 60794-1-2	EN 50267-1
IEC 60332-2-22 Cat A	EN 50267-2-2 & -3
IEC 61034 -1 & 2	RoHS directives
IEC 60754-1 & 2	

Ordering Information

Unit	Properties
OFC-349024-LBC	Multi Loose Tube Cable 24- fibre G652D CST HFFR
OFC-349036-LBC	Multi Loose Tube Cable 36- fibre G652D CST HFFR
OFC-349048-LBC	Multi Loose Tube Cable 48- fibre G652D CST HFFR
OFC-349060-LBC	Multi Loose Tube Cable 60- fibre G652D CST HFFR
OFC-349072-LBC	Multi Loose Tube Cable 72- fibre G652D CST HFFR
OFC-349096-LBC	Multi Loose Tube Cable 96- fibre G652D CST HFFR
OFC-349144-LBC	Multi Loose Tube Cable 144- fibre G652D CST HFFR
OFC-347024-LBC	Multi Loose Tube Cable 24- fibre G657A1 CST HFFR
OFC-347036-LBC	Multi Loose Tube Cable 36- fibre G657A1 CST HFFR
OFC-347048-LBC	Multi Loose Tube Cable 48- fibre G657A1 CST HFFR
OFC-347060-LBC	Multi Loose Tube Cable 60- fibre G657A1 CST HFFR
OFC-347072-LBC	Multi Loose Tube Cable 72- fibre G657A1 CST HFFR
OFC-347096-LBC	Multi Loose Tube Cable 96- fibre G657A1 CST HFFR
OFC-347144-LBC	Multi Loose Tube Cable 144- fibre G657A1 CST HFFR
OFC-341024-LBC	Multi Loose Tube Cable 24- fibre OM1 62.5/125 CST HFFR
OFC-341036-LBC	Multi Loose Tube Cable 36- fibre OM1 62.5/125 CST HFFR
OFC-341048-LBC	Multi Loose Tube Cable 48- fibre OM1 62.5/125 CST HFFR
OFC-341060-LBC	Multi Loose Tube Cable 60- fibre OM1 62.5/125 CST HFFR
OFC-341072-LBC	Multi Loose Tube Cable 72- fibre OM1 62.5/125 CST HFFR
OFC-341096-LBC	Multi Loose Tube Cable 96- fibre OM1 62.5/125 CST HFFR
OFC-341144-LBC	Multi Loose Tube Cable 144- fibre OM1 62.5/125 CST HFFR
OFC-342024-LBC	Multi Loose Tube Cable 24- fibre OM2 50/125 CST HFFR
OFC-342036-LBC	Multi Loose Tube Cable 36- fibre OM2 50/125 CST HFFR
OFC-342048-LBC	Multi Loose Tube Cable 48- fibre OM2 50/125 CST HFFR
OFC-342060-LBC	Multi Loose Tube Cable 60- fibre OM2 50/125 CST HFFR
OFC-342072-LBC	Multi Loose Tube Cable 72- fibre OM2 50/125 CST HFFR
OFC-342096-LBC	Multi Loose Tube Cable 96- fibre OM2 50/125 CST HFFR
OFC-342144-LBC	Multi Loose Tube Cable 144- fibre OM2 50/125 CST HFFR

**Fibre Optical Multi Loose Tube Cable, Indoor-Outdoor
24F to 144F, Corrugated Steel Tape Armour
2.3mm PBT**



OFC-34X024-LBC to OFC-34X144-LBC

OFC-343024-LBC	Multi Loose Tube Cable 24- fibre OM3 50/125 CST HFFR
OFC-343036-LBC	Multi Loose Tube Cable 36- fibre OM3 50/125 CST HFFR
OFC-343048-LBC	Multi Loose Tube Cable 48- fibre OM3 50/125 CST HFFR
OFC-343060-LBC	Multi Loose Tube Cable 60- fibre OM3 50/125 CST HFFR
OFC-343072-LBC	Multi Loose Tube Cable 72- fibre OM3 50/125 CST HFFR
OFC-343096-LBC	Multi Loose Tube Cable 96- fibre OM3 50/125 CST HFFR
OFC-343144-LBC	Multi Loose Tube Cable 144- fibre OM3 50/125 CST HFFR
OFC-344024-LBC	Multi Loose Tube Cable 24- fibre OM4 50/125 CST HFFR
OFC-344036-LBC	Multi Loose Tube Cable 36- fibre OM4 50/125 CST HFFR
OFC-344048-LBC	Multi Loose Tube Cable 48- fibre OM4 50/125 CST HFFR
OFC-344060-LBC	Multi Loose Tube Cable 60- fibre OM4 50/125 CST HFFR
OFC-344072-LBC	Multi Loose Tube Cable 72- fibre OM4 50/125 CST HFFR
OFC-344096-LBC	Multi Loose Tube Cable 96- fibre OM4 50/125 CST HFFR
OFC-344144-LBC	Multi Loose Tube Cable 144- fibre OM4 50/125 CST HFFR