

# Fibre Optical Multi Loose Tube Cable, In-Outdoor 288F, Corrugated Steel Tape Armour 2.3mm PBT




OFC-34X288-LBC

## Applications

Building interconnection, Backbone networks, Telecommunication and drop cable applications. This cable has full rodent protection and can be direct buried.

## Cross Section Drawing

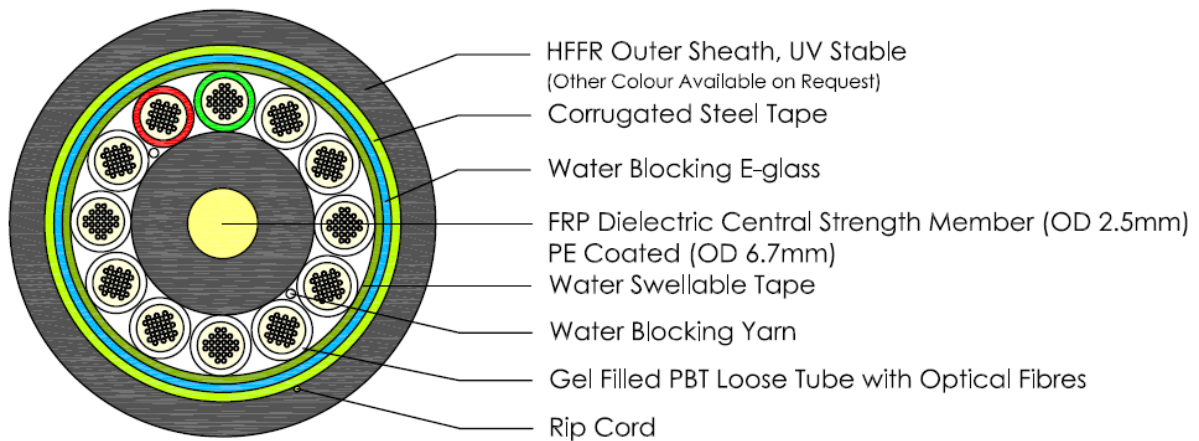

## Design

Unit	Properties
Fibre	Jelly Filled Loose Tube with Optical Fibre
Strength Member	Fibre Reinforced Central Strength Member (FRP) PE Coated
Waterblocking Agent – CSM	Water Swellable Yarn
Tape	Water Swellable Tape
Waterblocking Agent around Cable Core	Water Blocking E-Glass
Ripcord	Yes
Armour	Corrugated Steel Tape (CST)
Sheath Material	UV Stable Halogen Free Flame Retardant (HDPE)
Sheath Colour	Black as Standard
Standard Put Up Length	2000 meters
Packaging Details	Wooden Drum

\*Other Colors, Put Up Lengths and structures can be manufactured upon request, please contact your local B3 International sales representative.

# Fibre Optical Multi Loose Tube Cable, In-Outdoor 288F, Corrugated Steel Tape Armour 2.3mm PBT



## OFC-34X288-LBC

### Physical Characteristics

Fibre Count	No of Tubes/ Fillers	Fibres per tube	Loose tube Diameter (mm)	CSM OD (mm)	Cable OD (mm)	Cable Weigh (Kg/km)	Operating Temperature (°C)
288	12	24	2.3	2.7	17.5	311	-40 to +70

### Mechanical Characteristics

Fibre Count	Max. Tensile Strength (N)	Max. Crush Resistance	Impact	Min. Bend Radius
288	4500/1900	10KN / 10cm	3 Impacts (W/30N.m)	20xOD

### Colour Coding Scheme

Fibre Colour 1	2	3	4	5	6	7	8	9	10	11	12
Red	Green	Blue	Yellow	White	Grey	Brown	Violet	Turquoise	Black	Orange	Pink
Fibre Colour 13	14	15	16	17	18	19	20	21	22	23	24
Red	Green	Blue	Yellow	White	Grey	Brown	Violet	Turquoise	Black*	Orange	Pink
Fibre 13-24 with a Black Ring, * with a white ring											
Tube Colour											
Red	Green	White	White	White	White	White	White	White	White	White	White

### Reference Standards

ITU-T G652 , ITU-T G657	EN 50266-1
IEC60304	EN 50266-2-2
IEC 60794-1-2	EN 50267-1
IEC 60332-2-22 Cat A	EN 50267-2-2 & -3
IEC 61034 -1 & 2	RoHS directives
IEC 60754-1 & 2	

**Fibre Optical Multi Loose Tube Cable, In-Outdoor  
288F, Corrugated Steel Tape Armour  
2.3mm PBT**



---

**OFC-34X288-LBC**

**Ordering Information**

Partnumber	Description
OFC-349288-LBC	Multi Loose Tube Cable 288- fibre CST HFFR G652D
OFC-347288-LBC	Multi Loose Tube Cable 288- fibre CST HFFR G657A1
OFC-341288-LBC	Multi Loose Tube Cable 288- fibre CST HFFR OM1 62.5/125
OFC-342288-LBC	Multi Loose Tube Cable 288- fibre CST HFFR OM2 50/125
OFC-343288-LBC	Multi Loose Tube Cable 288- fibre CST HFFR OM3 50/125
OFC-344288-LBC	Multi Loose Tube Cable 288- fibre CST HFFR OM4 50/125